

3-AXIS DOME CAMERA

HTC-1NP





Main Features

- IR Distance 15M
- High Res Up to 540 TVL
- 3-Axis bracket
- BLC
- Auto gain control
- 3.7~12mm varifocal lens
- Low power consumption
- Service port

ITEM	HTC-1NP	
PICK UP DEVICE	1/3" CCD Image Sensor	
SYSTEM	NTSC	PAL
PICTURE ELEMENTS H*V	768 * 494	752 * 582
H. SYNC. FREQUENCY	15.734 KHz	15.625 KHz
V. SYNC. FREQUENCY	59.94Hz	50Hz
HORIZONTAL RESOLUTION	540 TV Lines	
SCANNING SYSTEM	2:1 Interlace	
SENSITIVITY	0 Lux When IR On	
SYNCHRONIZATION	Internal/ DC Type; Line Lock/ AC Type Only	
S/N RATIO	More Than 48 dB (AGC Off)	
DAY/NIGHT	Auto	
BACK LIGHT COMPENSATION	Switchable	
ELECTRONIC SHUTTER	Switchable	
AUTO GAIN CONTROL	Switchable	
WHITE BALANCE	Auto tracing white balance	
GAMMA	0.45	
LENS	Varifocal Auto Iris Lens: 3.7~12 mm	
ANGLE OF VIEW	H: 24°~75.4° V: 18.1°~55.6°	
LED	18 Unit 850nm infrared LED, 10000hrs	
VIDEO OUTPUT	1 Vpp , 75 Ohms	
POWER SUPPLY	DC 12V or AC 24V (Optional)	
POWER CONSUMPTION	270mA at DC 12V (IR ON), 120mA at DC 12V (IR OFF)	
DIMENSIONS (ψ*H)	132*108.4mm	
WEIGHT	450g	
STORAGE TEMPERATURE	-30 to + 60°C	
OPERATING TEMPERATURE	-10 to + 45°C	

Interface

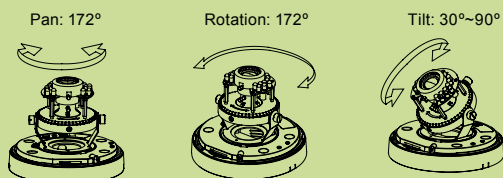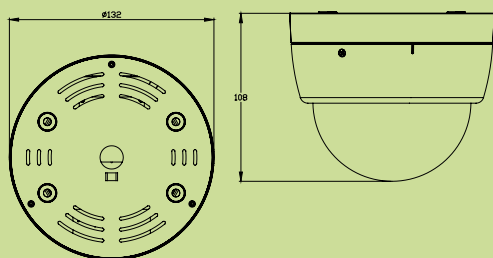

3-Axis Rotation

Unit: mm

©SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE