



HTC-1NP

Main Features


- IR Distance 15M
- 3-Axis bracket
- 1/3" Sony Super HAD II CCD
- High Res Up to 540 TVL
- 3pin switch
- Service port
- 3.7~12mm Japanese Lens
- Low power consumption



Interface



3-Axis Rotation

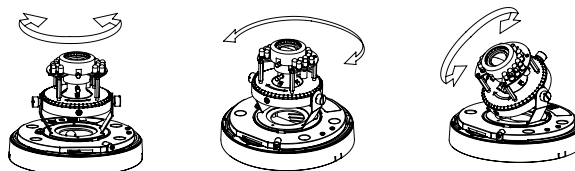

Specifications

ITEM	HTC-1NP	
PICK UP DEVICE	1/3" SONY Super HAD II CCD	
SYSTEM	NTSC	PAL
PICTURE ELEMENTS H*V	768 * 494	752 * 582
H. SYNC. FREQUENCY	15.734 KHz	15.625 KHz
V. SYNC. FREQUENCY	59.94Hz	50Hz
HORIZONTAL RESOLUTION	540 TV Lines	
SCANNING SYSTEM	2:1 Interlace	
SENSITIVITY	0.1Lux F1.2	
SYNCHRONIZATION	Internal/ DC Type; Line Lock/ AC Type Only	
S/N RATIO	More Than 48 dB (AGC Off)	
DAY/NIGHT	Auto	
BACK LIGHT COMPENSATION	Switchable	
ELECTRONIC SHUTTER	Switchable	

ITEM	HTC-1NP
AUTO GAIN CONTROL	Switchable
WHITE BALANCE	Auto tracing white balance
GAMMA	0.45
LENS	Varifocal Auto Iris Lens: 3.7~12 mm
LED	18 Unit 850nm infrared LED, 10000hrs
VIDEO OUTPUT	1 Vpp , 75 Ohms
POWER SUPPLY	DC 12V or AC 24V (Optional)
POWER CONSUMPTION	270mA at DC power (with IR)
DIMENSIONS (φ *H)	132*108.4mm
WEIGHT	450g
STORAGE TEMPERATURE	-30 to + 60 °C
OPERATING TEMPERATURE	-10 to + 45 °C

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE