


HTC-1WV

Main Features


- 1/3 Sony Super HAD II CCD
- D-WDR function
- Convenient OSD control
- Digital Noise Reduction
- 3.7~12mm Vari-focal Lens
- 3-axis bracket
- Vandal Proof



Interface

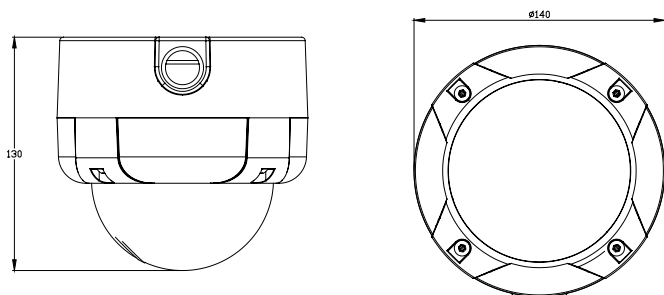

3-Axis Rotation

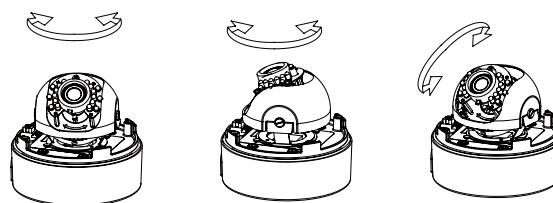

Specifications

ITEM	HTC-1WV	
PICK UP DEVICE	1/3" SONY Super HAD II CCD Image Sensor	
SYSTEM	NTSC	PAL
PICTURE ELEMENTS H * V	768 * 494	752 * 582
HORIZONTAL RESOLUTION	560 TV Lines	
SCANNING SYSTEM	2 : 1 Interlace	
SENSITIVITY	0.00001Lux @ F1.2(Sens-Up 258x)	
LENS	Varifocal 3.7~12mm , Auto IRIS Lens,	
OSD	Built-In	
BACKLIGHT	BLC/HSBLC/OFF	
S/N	More then 48dB	
WB	AWB/INDOOR/MANUAL/AWC	
ELECTRONIC SHUTTER SPEED	Manual 1/60~1/100000	
LED	18 Unit 850nm infrared LED, 10000hrs	

ITEM	HTC-1WV
SENS-UP	2x~258x
GAIN CONTRAL	High/Middle/Low/Off
3D DNR	On/Off
D-WDR	Indoor/Outdoor/Off
MOTION DETECTION	On/Off (4 Zone Selectable)
PRIVACY	On/Off(8 Zone)
FREEZE	On/Off
D & N FUNCTION	Color/Auto/Exit/BW
DIGITAL ZOOM	On(32x)/Off
LANGUAGE	English/Simplified Chinese/ Traditional /Korean /Japanese
POWER	DC 12V
WEIGHT	1100g
STORAGE TEMPERATURE	-30 to + 60 °C
OPERATING TEMPERATURE	-10 to + 45 °C
POWER CONSUMPTION	285mA

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE