

## HTK-16TR


### Main Features

- Control Speed Dome \ DVR at the same time.
- Support Dome Camera ID up to 99 & DVR ID up to 32.
- Support baud rate 2400 / 4800 / 9600.
- REMOTE-CONTROLLER protocol upgradeable by RS-232 from PC.




### Interface

Front Panel Layout

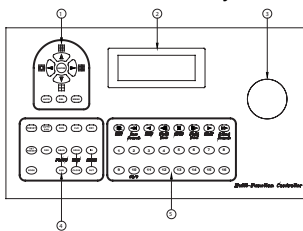

1. DVR Control	4. Dome Camera Control
2. LCD Panel	5. DVR Control 2 & Number Key
3. Joystick	

Back Panel Layout

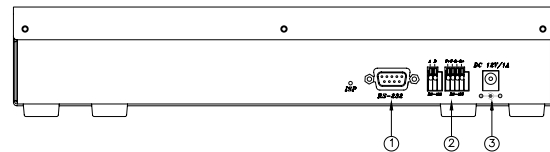

1. RS-232
2. RS-485
3. Power

### Specifications

MODEL NO.	HTK-16TR
IN/OUTPUT	RS-485, RS-422
POWER COMSUMPTION	DC12V, 1A , 2 Watts
SPPORT PROTOCOL	Speed Dome PELCO-D PELCO-P HUNT DYNACOLOR D7 PIH-7X(LILIN) DMP-15H1 Hunt DVR
OPERATION TEMPERATURE	5 to 45 °C
STORAGE HUMIDITY	5 to 95% Non-condensation
DIMENSIONS (W*H*D)	320x61x166 mm (Not Include Joystick)
WEIGHT	2D Joystick 1.4Kg / 3D Joystick 1.6Kg

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE