




HLC-79AD

Main Features

- High definition 720P @30 FPS
- Video out available
- IP66
- 2-Megapixel CMOS sensor
- Power over Ethernet available
- 20M built-in IR LED available
- Mechanism IR Cut filter available
- H.264/ JPEG/ MPEG4 compression
- SD card backup
- 2-way audio
- Support cell phone/PDA/3GPP
- SDK for software Integration

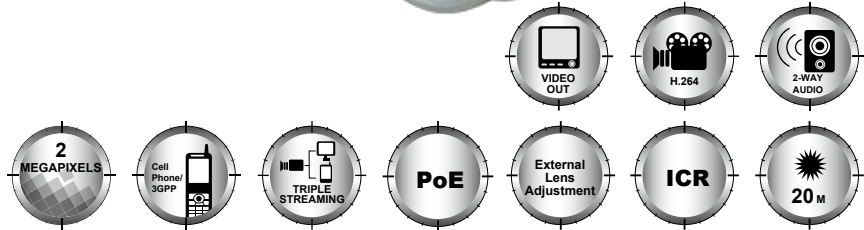

Interface

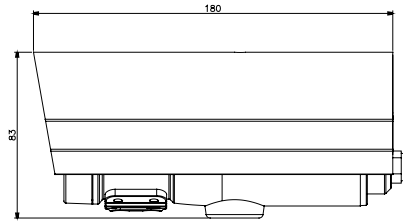

External Controller

Unit: mm

Specifications

Hardware	
CPU	ARM 9 ,32 bit RISC
RAM	256MB
Flash	16MB
Image Sensor	1/3.2" CMOS (2 Megapixels)
Sensitivity	0 lux (IR On)
Support DC IRIS	Yes
Lens Type	Vari-focal 3.6~16mm Megapixel Lens
ICR	Mechanism IR cut Filter
LED	Built-in 35 IR LED IR Distance 20M
I/O	1 in/ 1 Relay Out
Video Out	1
Audio In	1
Audio Out	1
Power over Ethernet	Optional
Power Consumption	DC 12V 500mA
Operating Temperature	0°C~40°C
Dimensions	83mm(φ) x 180mm(D)
Network	
Ethernet	10/ 100 Base-T
Network Protocol	HTTP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP

System	
Video Resolution	1600x1200, 1280x1024, 1280x960,1280x720, 800x600,640x480, 320x240, 176x144
Video Adjust	Brightness, Contrast, Sharpness, BLC, Night Mode
Triple Streaming	Yes
Image Snapshot	Yes
Full Screen Monitoring	Yes
Privacy Mask	Yes, 3 different areas
Compression Format	H.264/ JPEG/ MPEG4 (3GPP only)
Video Bitrates Adjust	CBR, VBR
Motion Detection	Yes, 3 different areas
Triggered Action	Mail, FTP, Save to SD card, Relay
Pre/ Post Alarm	Yes, configurable
Security	Password protection
Firmware Upgrade	HTTP mode, can be upgraded remotely
Simultaneous Connection	Up to 10
Audio	Yes, 2-way

Client system requirements

OS	Windows 2000, XP, 2003, Microsoft IE 6.0 or above
Hardware	
Suggested	Intel Dual Core 1.66G, RAM: 1024MB, Graphic card: 128MB
Minimum	Intel-C 2.8G, RAM: 512MB, Graphic card: 64MB

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE