




HLC-79M

Main Features

- IP66
- External Varifocal Lens adjustment
- True Day/Night function
- Mechanism IR Cut Filter available
- IR distance: 20M
- MPEG-4/MJPEG compression format
- Power over Ethernet available
- Support cell phone/PDA/3GPP
- Dual Streaming
- SDK for software integration
- Free bundle 36 channel recording software



Interface

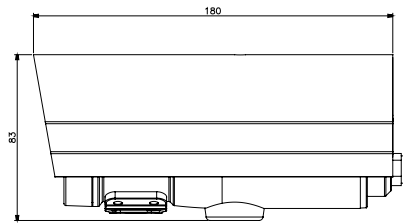

External Controller

Unit: mm

Specifications

Hardware	
CPU	ARM 9 ,32 bit RISC
RAM	64MB
Flash	8MB
Image sensor	1/4" CMOS
Sensitivity	0 lux (IR On)
Lens Type	Varifocal Auto Iris 2.8~10.5mm
ICR	Mechanism IR Cut Filter
LED	IR Distance 20M
Power over Ethernet	Optional
Power Consumption	DC 12V, 450mA
Operating Temperature	0°C ~40°C
Dimensions	83mm(φ) x 180mm(D)
Weight	700g

Network	
Ethernet	10/ 100 Base-T
Network Protocol	HTTP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, 3GPP, UPnP

System	
Video Resolution	1280x1024, 640x480, 320x240, 160x120
Video Adjust	Brightness, Contrast, Exposure, Sharpness
Dual Streaming	Yes
Image Snapshot	Yes
Full Screen Monitoring	Yes
Compression Format	MPEG-4 / MJPEG
Video Bitrate Adjust	CBR, VBR
Motion Detection	Yes, 3 different areas
Triggered Action	Mail, FTP
Pre/ Post Alarm	Yes, configurable
Security	Password protection
Firmware Upgrade	HTTP mode, can be upgraded remotely
Simultaneous Connection	Up to 10

Client system requirements	
OS	Windows 2000/2003, XP, Vista, Microsoft IE 6.0 or above
Hardware	
Suggested	Intel-C 2.0G, RAM: 512MB, Graphic card: 64MB
Minimum	Intel-C 1.6G, RAM: 256MB, Graphic card: 32MB

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE